



**GEDA**<sup>®</sup>  
ORIGINAL



- ▷ Innovations
- ▷ Know-how
- ▷ Up-to-date production technologies



**GEDA**<sup>®</sup>  
ORIGINAL



**GEDA**<sup>®</sup>  
World-wide competence



**GEDA**<sup>®</sup>  
CRANE OPERATOR HOIST  
2 PK

Your dealer:


**GEDA**<sup>®</sup>  
ORIGINAL

**GEDA-Dechentreiter  
GmbH & Co. KG**

Mertinger Straße 60  
D-86663 Asbach-Bäumenheim  
Phone +49 (0) 906 9809-0  
Fax +49 (0) 906 9809-50  
vertrieb@geda.de  
[www.geda.de](http://www.geda.de)

**GEDA®**

Safe and fast hoist for crane operating personnel

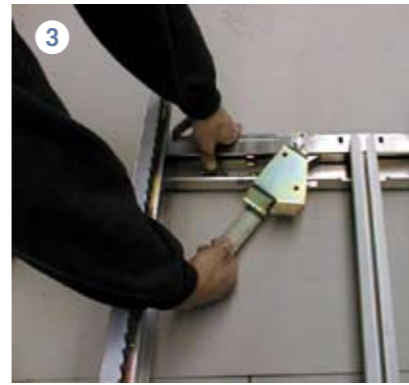

**Modular components for safe and quick assembly**

- ① Hoist cage with transition ramp
- ② Safe putting on of the lightweight ladder sections (22 kg) through the opened roof
- ③ Easy assembly thanks to the patented quick locking system
- ③ Integrated cable channel for guiding the trailing cable without any problems
- ④ Special anchorings for the rails to be installed tension-free to the crane mast
- ⑤ Base unit consisting of over speed safety device and cable bin for an assembly height of 60 m. Option: cable bin for an assembly height of 120 m (higher heights on request)



**Professional functionality – examined safety**

- ▷ Over speed safety device guarantees more safety
- ▷ Electrical security elements prevent improper operation
- ▷ Option: choose between control unit in the hoist cage or on the entrance/exit
- ▷ Safe transition thanks to the lateral protection and the barrier

The **GEDA 2 PK** is an individually applicable rack and pinion hoist with aluminium ladder sections. It is able to transport the crane operator to his working place in very short time.

**Its big advantage:** concentrated working from the beginning regardless of meteorological conditions and motivation. The GEDA 2 PK meets the requirements of the European Machinery Directive.

You can use the GEDA 2 PK for all types of cranes of the different manufacturers.



**GEDA®**  
**CRANE OPERATOR HOIST**  
**2 PK**

Load capacity **200 kg/ 2 people**  
Drive **1.5 kW/400V/50Hz**  
Lifting speed **25 m/min**  
Lift cage **0.6 x 1.1 m (1.8 m)**  
Lifting height **max. 120 m**

